


CIRRUS® Second Look®

Scored Tegular

fine texture

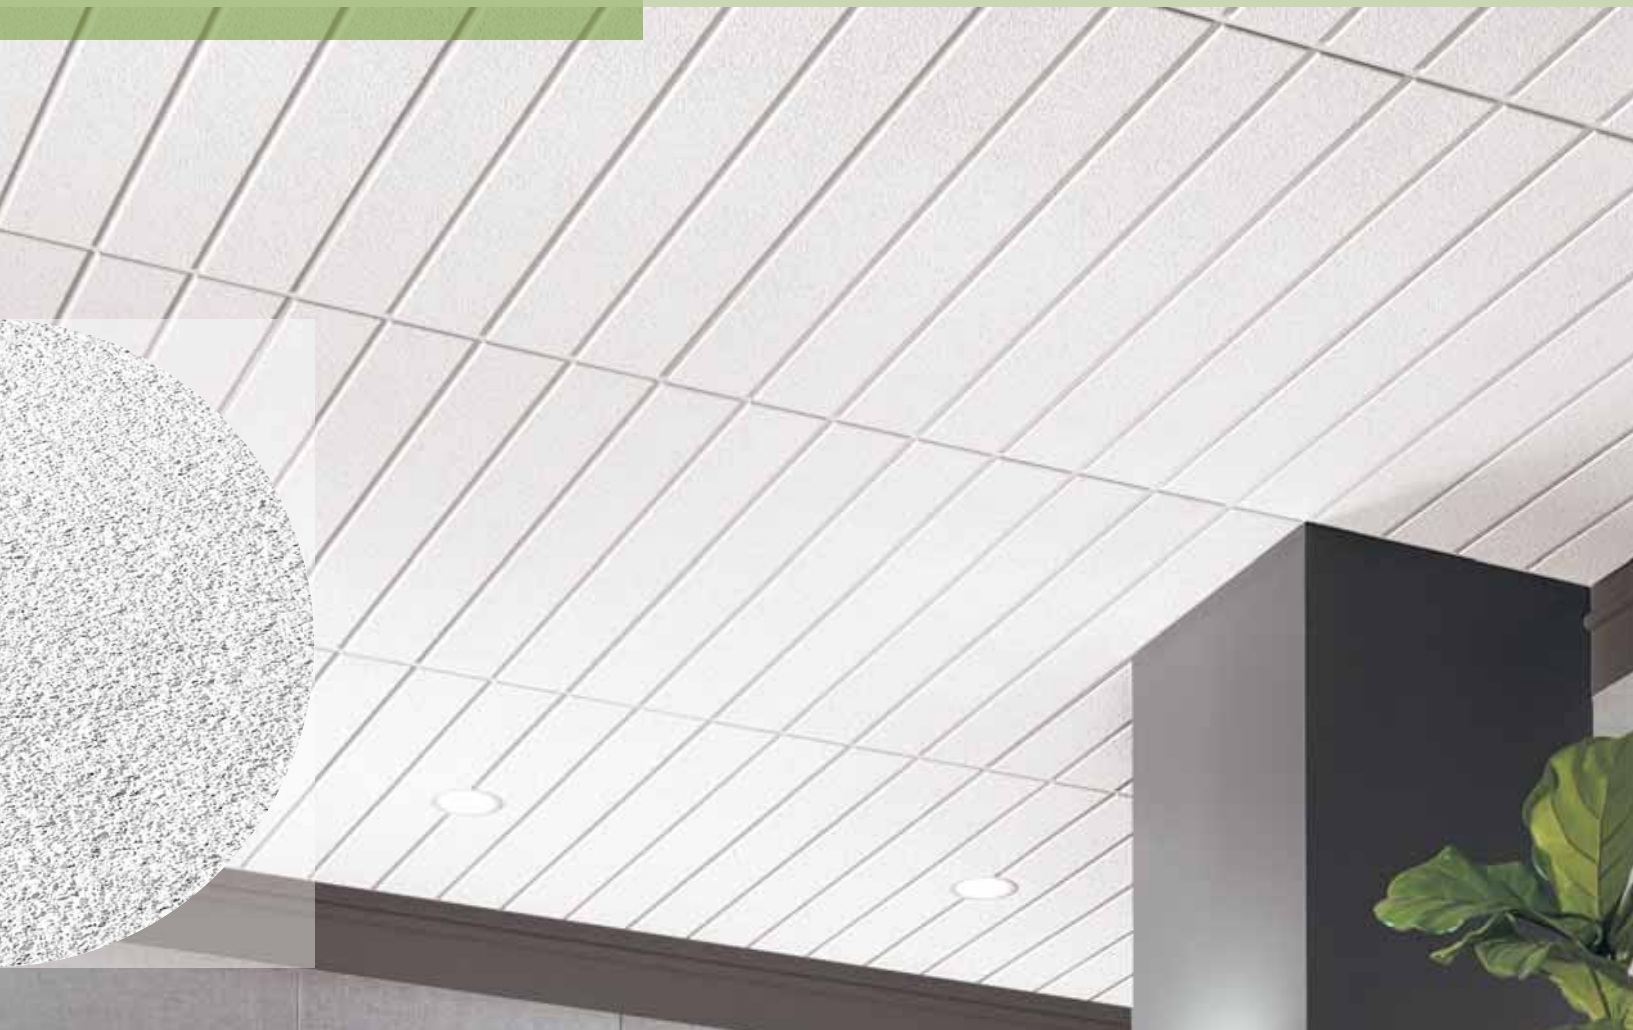

Cirrus Second Look III with Suprafine® 9/16" Exposed Tee grid

Key Selection Attributes

- Refined visual
- Excellent sound absorption
- 30-Year Limited System Warranty against mold/mildew and bacterial growth

Typical Applications

- Offices
- Healthcare – assists in addressing HIPAA requirements
- Conference rooms
- Lobbies/reception areas
- Department stores/retail

Face View Photos



Cirrus Second Look I – Scoring creates nominal 12" x 12" squares



Cirrus Second Look II – Scoring creates nominal 24" x 24" squares




Cirrus Second Look III – Scoring creates nominal 6" linear plank

Detail



CIRRUS Second Look III



CIRRUS Second Look III with SUPRAFINE 9/16" Exposed Tee grid

Color



White (WH)

CIRRUS® Second Look®

Scored Tegular
fine texture

Recycled Content: **71%**

LEED® Credits

Energy	Waste Mgmt	Recycled Content	Local Materials	Renewable Materials	Daylight & Views	LEED for Schools	
✓	✓	✓	✓	✓	✓	Acoustics	Low Emitting or CHPS
Location Dependent							✓

\$\$\$\$

Visual Selection

Performance Selection Dots represent highest level of performance.

Edge Profile	Item No.	Dimensions	UL Classified Acoustics NRC CAC	Fire Rating	Light Reflect	Sag Resist	Anti-Microbial	VOC Formaldehyde	Durable	Recycle Program	
											NRC
CIRRUS Second Look I											
15/16" Beveled Tegular	512 512M	2' x 4' x 3/4" 600 x 1200 x 19mm	0.65 35	Class A	0.85	S	BioBlock+	No Added	S	Yes	
CIRRUS Second Look II											
9/16" Beveled Tegular	510 510M	2' x 4' x 3/4" 600 x 1200 x 19mm	0.65 35	Class A	0.85	S		No Added	S		
15/16" Beveled Tegular	513 513M	2' x 4' x 3/4" 600 x 1200 x 19mm	0.65 35	Class A	0.85	S		No Added	S		
CIRRUS Second Look III											
9/16" Beveled Tegular	511 511M	2' x 4' x 3/4" 600 x 1200 x 19mm	0.65 35	Class A	0.85	S		No Added	S		
15/16" Beveled Tegular	514 514M	2' x 4' x 3/4" 600 x 1200 x 19mm	0.65 35	Class A	0.85	S		No Added	S		

S = Standard

Suspension Systems

9/16"	Standard: Suprafine®
15/16"	Standard: Prelude®

Physical Data

Material
Wet-formed mineral fiber

Surface Finish
Factory-applied latex paint

Fire Performance
ASTM E84 and CAN/ULC S102 surface burning characteristics. Flame Spread Index 25 or less. Smoke Developed Index 50 or less. (UL labeled)

ASTM E1264 Classification
Type III Form 1, Pattern E I K
Fire Class A

No-Added Formaldehyde
No-added formaldehyde – free of formaldehyde-based resins. Outperform CHPS Section 01350 requirements. (Independent test reports available upon request.)

Anti Mold/Mildew & Bacteria
BioBlock® Plus contains an anti-microbial treatment and provides guaranteed resistance against growth of mold/mildew and Gram-positive and Gram-negative odor/stain-causing bacteria for 30 years.

Insulation Value
R Factor – 1.9 (BTU units)
R Factor – 0.33 (Watts units)

Backloading Recommendation
Contact TechLine for specific information

Application Considerations
Not recommended for rooms containing MRI equipment.

30-Year Performance Guarantee & Warranty Information
See warranty details at armstrong.com/warranty

Weight; Square Feet/Carton
1.09 lbs/SF; 48 SF/ctn