

# CIRRUS® Themes

## Critters™ & Leaves™

Tegular fine texture



Cirrus Themes Critters with Suprafine® 9/16" Exposed Tee grid



Cirrus Themes Leaves with Suprafine 9/16" Exposed Tee grid

### Key Selection Attributes


- A variety of individual lighthearted panel designs on Cirrus refined texture; can be spot-painted
- Excellent sound absorption
- 30-Year Limited System Warranty against mold/mildew and bacterial growth
- Hardware Friendly Options are available for plain panels 295 and 299, providing precut finished edge details for fixture openings (1" to 16" diameter)

### Typical Applications

- Healthcare – assists in addressing HIPAA requirements
- Pediatric areas
- Lobbies/reception areas
- Specialty shops/stores
- Playful theme interiors

### Face View Drawings

#### Cirrus Critters




### Face View Drawings

#### Cirrus Leaves



### Detail and Grid Intersections

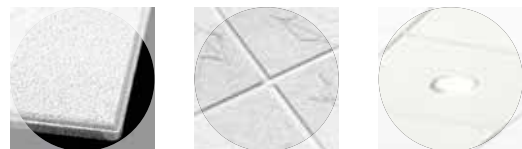

CIRRUS Themes Plain Panel

CIRRUS Themes Leaves with SUPRAFINE 9/16" Exposed Tee grid

Hardware Friendly Options Available

### Color



White (WH)



Cirrus Themes Panels may be spot-painted



# CIRRUS® Themes

Critters™ & Leaves™

Tegular fine texture

Recycled Content: 65-83%

LEED® Credits

Energy	Waste Mgmt	Recycled Content	Local Materials	Renewable Materials	Daylight & Views	LEED for Schools	
✓	✓	✓	✓	✓	✓	Acoustics	Low Emitting or CHPS
			Location Dependent				✓

\$\$\$\$\$

## Visual Selection

## Performance Selection Dots represent highest level of performance.

Edge Profile	Item No.	Dimensions	UL Classified Acoustics NRC CAC	Fire Rating	Light Reflect	Sag Resist	Anti-Microbial	VOC Formaldehyde	Durable	Recycle Program
<b>CIRRUS Themes Critters*</b>										
9/16" Beveled Tegular 	S500 Series S500M Series	2' x 2' x 3/4" 600 x 600 x 19mm	<input type="checkbox"/> 0.65 35	Class A	0.86	S	BioBlock+	No Added	S	Yes
15/16" Angled Tegular 	S550 Series S550M Series	2' x 2' x 3/4" 600 x 600 x 19mm	<input type="checkbox"/> 0.65 35	Class A	0.86	S		No Added	S	
<b>CIRRUS Themes Leaves*</b>										
9/16" Beveled Tegular 	S600 Series S600M Series	2' x 2' x 3/4" 600 x 600 x 19mm	<input type="checkbox"/> 0.65 35	Class A	0.86	S		No Added	S	
15/16" Angled Tegular 	S650 Series S650M Series	2' x 2' x 3/4" 600 x 600 x 19mm	<input type="checkbox"/> 0.65 35	Class A	0.86	S		No Added	S	
<b>CIRRUS Themes Plain Panel – available with Hardware Friendly Options (U.S. Patent 5,231,810)</b>										
9/16" Beveled Tegular 	S299 Series S299M	2' x 2' x 3/4" 600 x 600 x 19mm	<input type="checkbox"/> 0.65 35	Class A	0.86	S		No Added	S	
15/16" Angled Tegular 	S295 Series S295M	2' x 2' x 3/4" 600 x 600 x 19mm	<input type="checkbox"/> 0.65 35	Class A	0.86	S		No Added	S	

S = Standard

\* Ceiling design copyrighted by AWI Licensing Company.

**Note:** Specify Cirrus Themes plain panels S299/S295 when plain panels are required.

## Suspension Systems

9/16"	Standard: Interlude®, Sonata™, Suprafine®
15/16"	Standard: Prelude®

## Physical Data

### Material

Wet-formed mineral fiber

### Surface Finish

Factory-applied latex paint

### Fire Performance

ASTM E84 and CAN/ULC S102 surface burning characteristics. Flame Spread Index 25 or less. Smoke Developed Index 50 or less. (UL labeled)

### ASTM E1264 Classification

Type III, Form 1, Pattern E I K Z (scored multi-patterned finish)  
S299, S295 – Type III, Form 1, Pattern E I  
Fire Class A

### No-Added Formaldehyde

No-added formaldehyde – free of formaldehyde-based resins. Outperform CHPS Section 01350 requirements. (Independent test reports available upon request.)

### Anti Mold/Mildew & Bacteria

BioBlock® Plus contains an anti-microbial treatment and provides guaranteed resistance against growth of mold/mildew and Gram-positive and Gram-negative odor/stain-causing bacteria for 30 years.

### Insulation Value

R Factor – 1.9 (BTU units)  
R Factor – 0.33 (Watts units)

### Backloading Recommendation

Contact TechLine for specific information

### 30-Year Performance Guarantee & Warranty Information

See warranty details at [armstrong.com/warranty](http://armstrong.com/warranty)

### Application Considerations

Specify matching plain panels S299/S295 when required. Not recommended for rooms containing MRI equipment.

### Weight: Square Feet/Carton

All design panels – 1.38 lbs/SF; 8 SF/ctn  
S295 – 1.09 lbs/SF; 48 SF/ctn  
S299 – 1.17 lbs/SF; 48 SF/ctn

TechLine<sup>SM</sup> / 1 877 ARMSTRONG

1 877 276 7876

[armstrong.com/ceilings](http://armstrong.com/ceilings) (search: cirrus)

CS-3058-109

© AWI Licensing Company, 2009 • Printed in the United States of America



# CIRRUS® Themes

Stars™ & Things That Fly™

Tegular fine texture



Cirrus Themes Stars with Suprafine® 9/16" Exposed Tee grid



Cirrus Themes Things That Fly with Suprafine 9/16" Exposed Tee grid

## Key Selection Attributes


- A variety of individual lighthearted panel designs on Cirrus refined texture; can be spot-painted
- Excellent sound absorption
- 30-Year Limited System Warranty against mold/mildew and bacterial growth
- Hardware Friendly Options are available for plain panels 295 and 299, providing precut finished edge details for fixture openings (1" to 16" diameter)

## Typical Applications

- Healthcare – assists in addressing HIPAA requirements
- Pediatric areas
- Lobbies/reception areas
- Specialty shops/stores
- Playful theme interiors


## Face View Drawings

### Cirrus Themes Stars

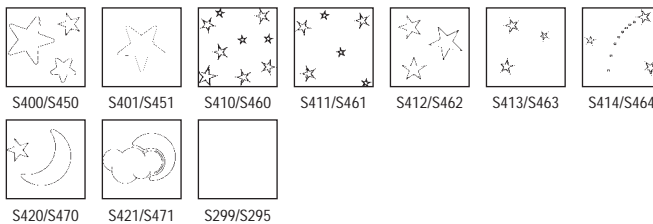

## Face View Drawings

### Cirrus Themes Things That Fly

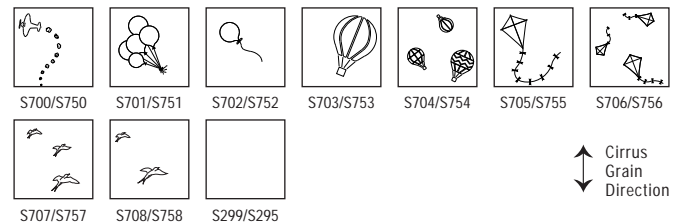


## Detail and Grid Intersections



CIRRUS Beveled Tegular Plain Panel



CIRRUS Themes Stars with SUPRAFINE 9/16" Exposed Tee grid



Hardware Friendly Options Available

## Color



White (WH)

Cirrus Themes Panels may be spot-painted



# CIRRUS® Themes

Stars™ & Things That Fly™

Tegular fine texture

Recycled Content: 65-83%

LEED® Credits








Energy	Waste Mgmt	Recycled Content	Local Materials	Renewable Materials	Daylight & Views	Acoustics	Low Emitting or CHPS
✓	✓	✓	✓	✓	✓		✓
Location Dependent							

\$\$\$\$\$

## Visual Selection

## Performance Selection

Dots represent highest level of performance.

Edge Profile	Item No.	Dimensions	UL Classified		Fire Rating	Light Reflect	Sag Resist	Anti-Microbial	VOC Formaldehyde	Durable	Recycle Program	
			Acoustics NRC	CAC								
<b>CIRRUS Themes Stars*</b>												
9/16" Beveled Tegular 	S400 Series S400M Series	2' x 2' x 3/4" 600 x 600 x 19mm		0.65	35	Class A	0.86	S	BioBlock+	No Added	S	Yes
15/16" Angled Tegular 	S450 Series S450M Series	2' x 2' x 3/4" 600 x 600 x 19mm		0.65	35	Class A	0.86	S		No Added	S	
<b>CIRRUS Themes Things That Fly*</b>												
9/16" Beveled Tegular 	S700 Series S700M Series	2' x 2' x 3/4" 600 x 600 x 19mm		0.65	35	Class A	0.86	S		No Added	S	
15/16" Angled Tegular 	S750 Series S750M Series	2' x 2' x 3/4" 600 x 600 x 19mm		0.65	35	Class A	0.86	S		No Added	S	
<b>CIRRUS Themes Plain Panel – available with Hardware Friendly Options (U.S. Patent 5,231,810)</b>												
9/16" Beveled Tegular 	S299 S299M	2' x 2' x 3/4" 600 x 600 x 19mm		0.65	35	Class A	0.86	S		No Added	S	
15/16" Angled Tegular 	S295 S295M	2' x 2' x 3/4" 600 x 600 x 19mm		0.65	35	Class A	0.86	S		No Added	S	

S = Standard  
\* Ceiling design copyrighted by AWI Licensing Company.

Note: Specify Cirrus Themes plain panels S299/S295 when plain panels are required.

## Suspension Systems

9/16"	Standard: Interlude®, Sonata™, Suprafine®
15/16"	Standard: Prelude®

## Physical Data

### Material

Wet-formed mineral fiber

### Surface Finish

Factory-applied latex paint

### Fire Performance

ASTM E84 and CAN/ULC S102 surface burning characteristics. Flame Spread Index 25 or less. Smoke Developed Index 50 or less. (UL labeled)

### ASTM E1264 Classification

Type III, Form 1, Pattern E I K Z (scored multi-patterned finish)  
S299, S295 – Type III, Form 1, Pattern E I  
Fire Class A

### No-Added Formaldehyde

No-added formaldehyde – free of formaldehyde-based resins. Outperform CHPS Section 01350 requirements. (Independent test reports available upon request.)

### Anti Mold/Mildew & Bacteria

BioBlock® Plus contains an anti-microbial treatment and provides guaranteed resistance against growth of mold/mildew and Gram-positive and Gram-negative odor/stain-causing bacteria for 30 years.

### Insulation Value

R Factor – 1.9 (BTU units)  
R Factor – 0.33 (Watts units)

### Backloading Recommendation

Contact TechLine for specific information

### 30-Year Performance Guarantee & Warranty Information

See warranty details at [armstrong.com/warranty](http://armstrong.com/warranty)

### Application Considerations

Specify matching plain panels S299/S295 when required. Not recommended for rooms containing MRI equipment.

### Weight; Square Feet/Carton

All design panels – 1.38 lbs/SF; 8 SF/ctn  
S295 – 1.09 lbs/SF; 48 SF/ctn  
S299 – 1.17 lbs/SF; 48 SF/ctn

TechLine<sup>SM</sup> / 1 877 ARMSTRONG  
1 877 276 7876

[armstrong.com/ceilings](http://armstrong.com/ceilings) (search: cirrus)  
CS-3059-109

© AWI Licensing Company, 2009 • Printed in the United States of America



# CIRRUS® Themes

Under the Sea™  
Tegular fine texture



Cirrus Themes Under the Sea with Suprafine® 9/16" Exposed Tee grid

## Key Selection Attributes

- A variety of individual lighthearted panel designs on Cirrus refined texture; can be spot-painted
- Excellent sound absorption
- 30-Year Limited System Warranty against mold/mildew and bacterial growth
- Hardware Friendly Options are available for plain panels 295 and 299, providing precut finished edge details for fixture openings (1" to 16" diameter)

## Typical Applications

- Healthcare – assists in addressing HIPAA requirements
- Pediatric areas
- Lobbies/reception areas
- Specialty shops/stores
- Playful theme interiors


## Face View Drawings

### Cirrus Themes Under the Sea




↑ Cirrus Grain Direction  
↓

## Detail and Grid Intersections



CIRRUS Beveled Tegular Plain Panel



CIRRUS Themes Under the Sea with SUPRAFINE 9/16" Exposed Tee grid



Hardware Friendly Options Available

## Color



White (WH)

Cirrus Themes Panels may be spot-painted



# CIRRUS® Themes

Under the Sea™  
Tegular fine texture

Recycled Content: 65-83%

LEED® Credits

Energy	Waste Mgmt	Recycled Content	Local Materials	Renewable Materials	Daylight & Views	Acoustics	Low Emitting or CHPS
✓	✓	✓	✓	✓	✓		✓
Location Dependent							

\$\$\$\$\$

## Visual Selection

## Performance Selection Dots represent highest level of performance.

Edge Profile	Item No.	Dimensions	UL Classified Acoustics NRC CAC	Fire Rating	Light Reflect	Sag Resist	Anti-Microbial	VOC Formaldehyde	Durable	Recycle Program
<b>CIRRUS Themes Under the Sea*</b>										
9/16" Beveled Tegular 	S800 Series S800M Series	2' x 2' x 3/4" 600 x 600 x 19mm	<input type="checkbox"/> 0.65 35	Class A	0.86	S	BioBlock+	No Added	S	Yes
15/16" Angled Tegular 	S850 Series S850M Series	2' x 2' x 3/4" 600 x 600 x 19mm	<input type="checkbox"/> 0.65 35	Class A	0.86	S		No Added	S	
<b>CIRRUS Themes Plain Panel – available with Hardware Friendly Options (U.S. Patent 5,231,810)</b>										
9/16" Beveled Tegular 	S299 S299M	2' x 2' x 3/4" 600 x 600 x 19mm	<input type="checkbox"/> 0.65 35	Class A	0.86	S		No Added	S	
15/16" Angled Tegular 	S295 S295M	2' x 2' x 3/4" 600 x 600 x 19mm	<input type="checkbox"/> 0.65 35	Class A	0.86	S		No Added	S	

S = Standard

\* Ceiling design copyrighted by AWI Licensing Company.

Note: Specify Cirrus Themes plain panels S299/S295 when plain panels are required.

## Suspension Systems

9/16"	Standard: Interlude®, Sonata™, Suprafine®
15/16"	Standard: Prelude®

## Physical Data

### Material

Wet-formed mineral fiber

### Surface Finish

Factory-applied latex paint

### Fire Performance

ASTM E84 and CAN/ULC S102 surface burning characteristics. Flame Spread Index 25 or less. Smoke Developed Index 50 or less. (UL labeled)

### ASTM E1264 Classification

Type III, Form 1, Pattern E I K Z (scored multi-patterned finish)  
S299, S295 – Type III, Form 1, Pattern E I  
Fire Class A

### No-Added Formaldehyde

No-added formaldehyde – free of formaldehyde-based resins. Outperform CHPS Section 01350 requirements. (Independent test reports available upon request.)

### Anti Mold/Mildew & Bacteria

BioBlock® Plus contains an anti-microbial treatment and provides guaranteed resistance against growth of mold/mildew and Gram-positive and Gram-negative odor/stain-causing bacteria for 30 years.

### Insulation Value

R Factor – 1.9 (BTU units)  
R Factor – 0.33 (Watts units)

### Backloading Recommendation

Contact TechLine for specific information

### 30-Year Performance Guarantee & Warranty Information

See warranty details at [armstrong.com/warranty](http://armstrong.com/warranty)

### Application Considerations

Specify matching plain panels S299/S295 when required.  
Not recommended for rooms containing MRI equipment.

### Weight: Square Feet/Carton

All design panels – 1.38 lbs/SF; 8 SF/ctn  
S295 – 1.09 lbs/SF; 48 SF/ctn  
S299 – 1.17 lbs/SF; 48 SF/ctn

TechLine<sup>SM</sup> / 1 877 ARMSTRONG

1 877 276 7876

[armstrong.com/ceilings](http://armstrong.com/ceilings) (search: cirrus)

CS-3348-109

© AWI Licensing Company, 2009 • Printed in the United States of America

