



Recycled
Content:
25%

Exposed Tee System Accessories

Problem solving accessories for Exposed Tee Systems provide installation solutions that can save time, money and labor.

All accessories are compatible with **PeakForm™** (1-11/16" profile) and square bulb (1-1/2" profile) main beams.



Product Description


Materials

A. General:


Commercial-quality cold rolled galvanized/hot dipped galvanized steel, chemically cleansed.

B. Components:


- 3. Seismic Joint Clip – MB** – Allows the ceiling to be divided at a splice on main beam to accommodate the IBC mandate for ceiling areas greater than 2500 sf to have seismic separation joints. ES4 expansion sleeve is used to cover 3/4" gap.
☐ **SJMR15**




100 pcs/bucket
- 6. DW58LT – Transition Clip with Locking Tabs for 5/8" Drywall**
Facilitates transition from drywall to acoustical ceiling; one-sided hold-down clip; eliminates need for drywall bead. Locking tabs provide secure location for DGS tees.
☐ **DW58LT**




125 pcs/bucket
- 9. 7327GA – Grid Adapter** – Allows for easy directional changes of Prelude Main beams; 27" long component has two different end details. One end has a SuperLock™ clip with a rout 3" from the end, opposite end has an XL2 clip with over-ride end detail. This enables the adapter to be connected to either end of a Prelude main beam or plugged into a rout location on a main beam or cross tee.
☐ **7327**




60 pcs/carton
- 12. Seismic Joint Clip CT** – Offers a faster, easier and better seismic solution for Seismic Category D, E and F installations. Armstrong offers the only State University of New York, University of Buffalo-tested approach to creating seismic separation joints in IBC Category D, E and F installations.
☐ **SJCG**




200 pcs/bucket
- 1. BERC2 – 2" Beam End Retaining Clip** – Joins main beam or cross tee to wall molding and web of grid with no visible pop rivets
☐ **BERC2**




200 pcs/bucket
- 2. BERC – Beam End Retaining Clip**
Joins web of main beam or cross tee to wall molding with no visible pop rivets
☐ **BERC**




200 pcs/bucket
- 4. ABSC – Air Bar Spacer Clip**
Parallel attachment of main runners; evenly spaces grid members for air diffuser; available in sizes from 1-7/8" to 6" in 1/8" increments
☐ **ABSC**




250 pcs/bucket
- 5. DLCC – Direct Load Ceiling Clip**
To hang suspension system below existing 15/16" grid face, transferring weight directly to hanger wire; may be used to preserve the fire rating of an existing ceiling and to support heavy accessories
☐ **DLCC**




250 pcs/bucket
- 7. EHDC50 – Exterior Hold Down Clip for 1/2" lay-in ceiling panels and drywall;**
EHDC58 – Exterior Hold Down Clip for 5/8" lay-in ceiling panels and drywall;
EHDC75 – Exterior Hold Down Clip for 3/4" lay-in ceiling panels and drywall; locks under bulb of grid member to prevent upward movement
☐ **EHDC50** ☐ **EHDC58** ☐ **EHDC75**




125 pcs/bucket
- 8. UPC – Partition Clip**
Fastens partition track section to grid for secure attachment; flip for 9/16" or 15/16" grid
☐ **UPC**




200 pcs/bucket
- 10. UTC – Uptight Clip**
For tight grid attachment to 1-1/2" channel; bridging under HVAC ducts; can be used to install grid tight to wood joists
☐ **UTC**




250 pcs/bucket
- 11. CBS4 – 4" Channel Beam Splice; CBS6 – 6" Channel Beam Splice; CBS8 – 8" Channel Beam Splice; CBS10 – 10" Channel Beam Splice; CBS12 – 12" Channel Beam Splice** – Used to suspend main beams to 1-1/2" black iron carrying channels
☐ **CBS4** 100 pcs/bucket
☐ **CBS6** 100 pcs/bucket
☐ **CBS8** 100 pcs/bucket
☐ **CBS10** 100 pcs/bucket
☐ **CBS12** 75 pcs/bucket



- 13. CBS2006 – 6" Channel Beam Splice; CBS2008 – 8" Channel Beam Splice**
Used to suspend main beams to 2" black iron carrying channels
☐ **CBS2006**
☐ **CBS2008**




100 pcs/bucket
- 14. ES4 – 4" Expansion Sleeve** for 15/16" main beams and cross tee; covers expansion joints, screw holes in grid face
☐ **ES4**



100 pcs/bucket
- 15. C1430 – Variable Placement Hook Clip**
Attach to T-bar to create special length tees and position anywhere along the main beams
☐ **C1430**



200 pcs/bucket
- 16. WS12 – Hanger Wire Splice**
Splices #12 gauge hanger wire; recommended for renovation applications; provides easy adjustment of ceiling height
☐ **WS12**




1,000 pcs/bucket

Exposed Tee System Accessories




17. **7866 – Bullnose Corner Cover** – For nominal 7/8" molding; snap over molding to trim outside corners; fits 1" radius block; 2" legs
☐ **7866**




100 pcs/bucket

- 7864 – Bullnose Corner Cover** – For nominal 7/8" molding; fits 3/4" radius block; 2" legs
☐ **7864**




18. **7867 – Field Cut Corner Cover** For nominal 15/16" molding; cut to fit irregular corner conditions; 2" legs
☐ **7867**




100 pcs/bucket

19. **7869 – Inside/Outside Corner Cover** For nominal 7/8" angle molding; 1-3/4" legs
☐ **7869**

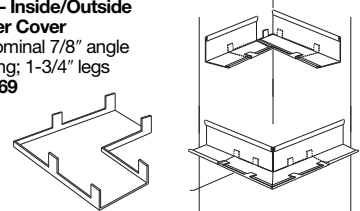


50 pcs/bucket

20. **7863 – Outside Corner Cover** For nominal 7/8" angle molding; snap over molding to trim outside corners; 2" legs
☐ **7863**

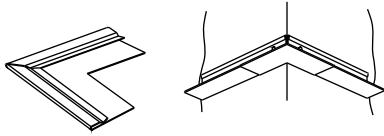


100 pcs/bucket

21. **7865 – Outside Corner Cover** For nominal 9/16" angle molding; snap over molding to trim outside corners; 2" legs
☐ **7865**

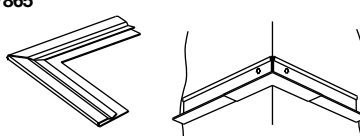


100 pcs/bucket

22. **7861 – Shadow Mold-Inside Corner** For 7873 shadow mold (9/16" horizontal leg 3/8" reveal), snaps over mold to easily trim inside corner.
☐ **7861**




100 pcs/bucket

23. **7862 – Shadow Mold-Outside Corner** For 7873 shadow mold (9/16" horizontal leg 3/8" reveal), snaps over mold to easily trim outside corner.
☐ **7862**




100 pcs/bucket

24. **LFC – Fixture Clip** Prefinished white for use at corners of light fixture modules on 9/16" exposed tee grid systems (Suprafine®, Interlude®, Silhouette®); increases corner size to 15/16" which adapts light fixtures designed for 15/16" grid; used when fixtures are not positively attached to grid
☐ **LFC**




80 pcs/bucket

25. **414 – Retention Clip** Attaches to main beams and cross tees behind lay-in ceiling; helps prevent accidental panel displacement by basketballs and other forces from below ceiling
☐ **414**




100 pcs/bucket

26. **UHDC – Universal Hold Down Clip** Attaches to top bulb of grid to hold 1/16" to 5/8" lay-in tile in place; helps to prevent ceiling tile fluttering at entryways
☐ **UHDC**




1,000 pcs/bucket

27. **DWC – Drywall Clip** Allows for a "second" ceiling to be installed below a drywall ceiling; attach through installed drywall to supporting structure; DWC approved for use in UL Designs P237, P239, P240 and P241.
☐ **DWC**




250 pcs/bucket

28. **7891 – 12 Gauge Soft Hanger Wire** (12' length) Used to hang suspended ceilings from structural deck
☐ **7891**




140 pcs/bucket

29. **XTAC – Cross Tee Adapter Clip** Used to attach field cut cross tees to main beams.
☐ **XTAC**

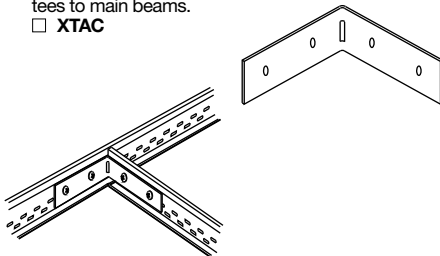

100 pcs/bucket

30. **MBSC2 – Main Beam Spacer Clip** (2" in length) Used to space two parallel main beams for air supply or return; typically used 4' O.C.
☐ **MBSC2**

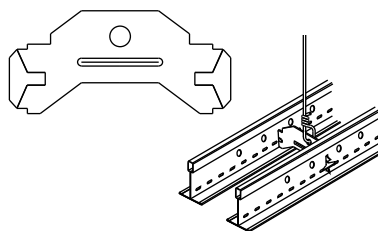

200 pcs/bucket

31. **7445 – 48" Stabilizer Bar**
7425 – 24" Stabilizer Bar Used to maintain uniform spacing of suspension system components (main beams and cross tees)
☐ **7445 – 48"**
☐ **7425 – 24"**

