


# FINE FISSURED™ Second Look®

Scored Tegular  
medium texture



Items 1760, 1761, 1762, 1763

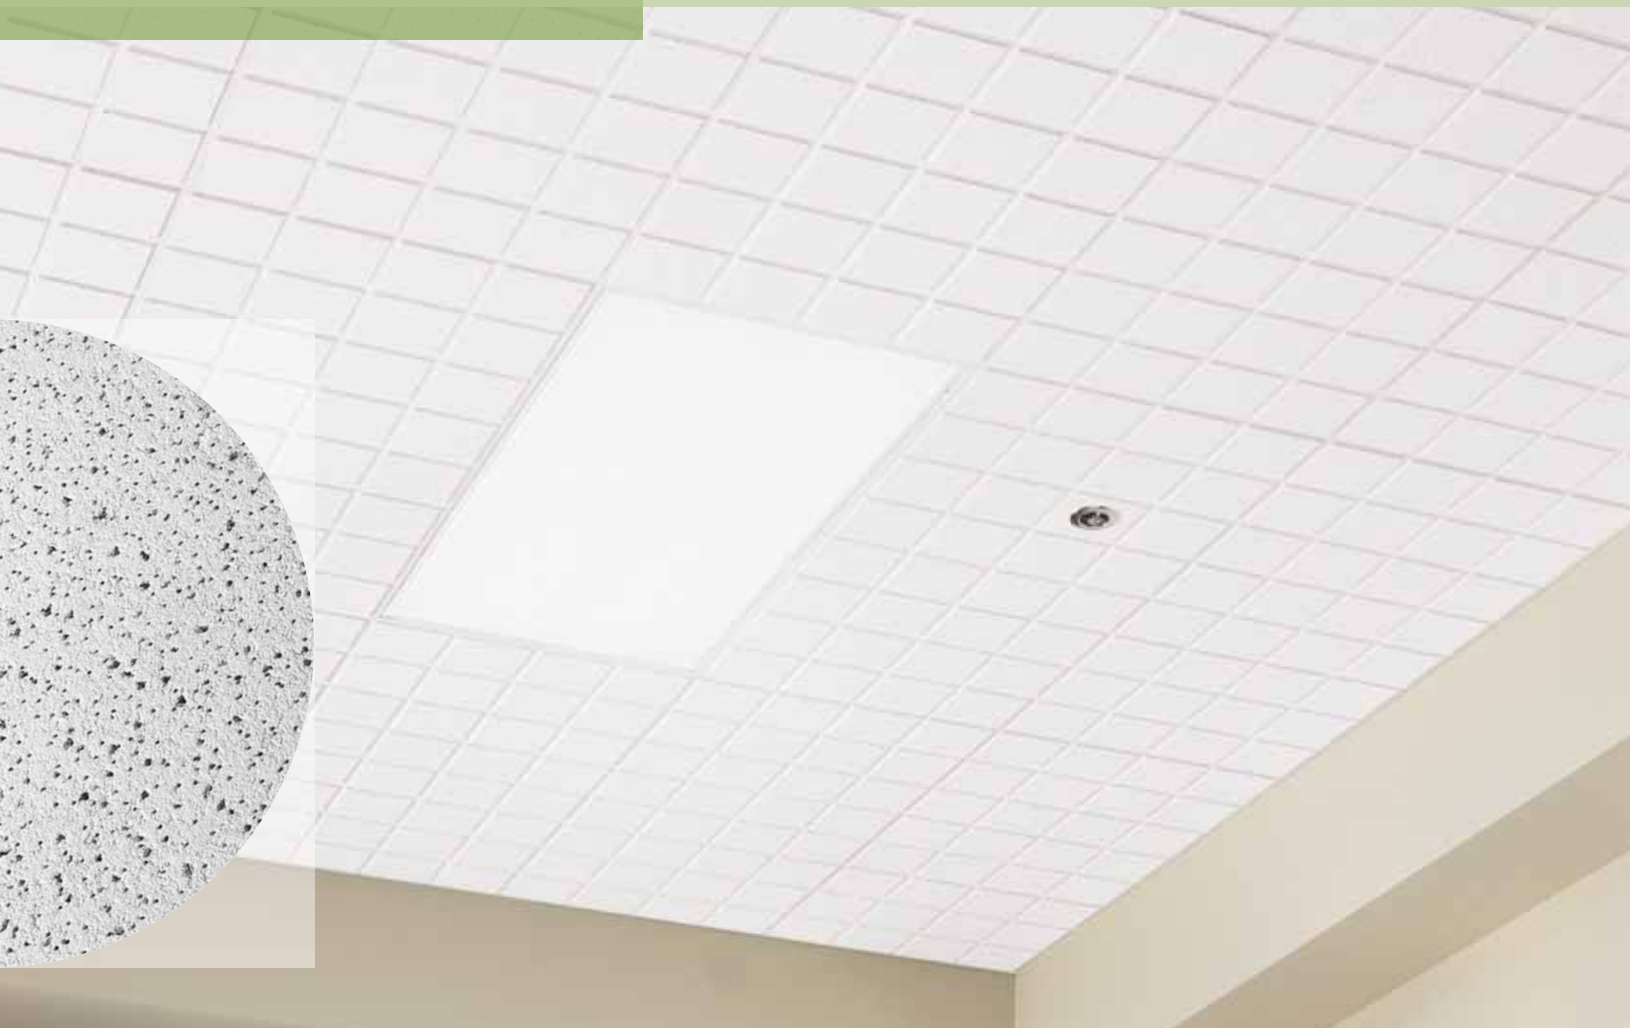

Fine Fissured Second Look IV with Suprafine® 9/16" Exposed Tee grid

## Key Selection Attributes

- Geometric scored visuals
- Standard colors available
- 30-Year Limited System Warranty against visible sag, mold/mildew and bacterial growth
- Non-directional visual reduces installation time and scrap

## Typical Applications

- Department stores/retail and many types of commercial interiors

## Color Selection

Due to printing limitations, shade may vary from actual product.



White (WH)



Cream (CR)



Haze (HA)



Camel (CM)




Platinum (PL)

Items 1760 and 1761 are available in colors. All other items are available in white only. Colored ceilings are dye-lotted and should be segregated by dye lot. Do not mix.

## Detail



FINE FISSURED  
Second Look IV



FINE FISSURED  
Second Look IV with  
SUPRAFINE 9/16"  
Exposed Tee grid



# FINE FISSURED™ Second Look

Scored Tegular  
medium texture

Recycled Content: 28-38% Fire Guard 51%

LEED® Credits

Energy	Waste Mgmt	Recycled Content	Local Materials	Renewable Materials	Daylight & Views	Acoustics	Low Emitting or CHPS
✓	✓	✓	✓	✓	✓		✓
Location Dependent							

\$\$\$\$\$

## Visual Selection

## Performance Selection

Dots represent highest level of performance.

Edge Profile	Item No.	Dimensions	UL Classified	Acoustics		Fire Rating	Light Reflect	Sag Resist	Anti-Microbial	VOC Formaldehyde	Durable	Recycle Program
				NRC	CAC							
<b>FINE FISSURED Second Look I</b>												
9/16" Angled Tegular	1765	2' x 4' x 3/4"		0.55	30	Class A	0.84	HumiGuard+	BioBlock+	Low	S	Yes
15/16" Angled Tegular	1760	2' x 4' x 3/4"		0.55	35	Class A	0.84			Low	S	
<b>FINE FISSURED Second Look II</b>												
9/16" Angled Tegular	1766	2' x 4' x 3/4"		0.55	30	Class A	0.84			Low	S	
15/16" Angled Tegular	1761	2' x 4' x 3/4"		0.55	35	Class A	0.84			Low	S	
	1761M	600 x 1200 x 19mm										
	1861	2' x 4' x 3/4"		0.55	35	Fire Guard	0.84			No Added	S	
<b>FINE FISSURED Second Look III</b>												
9/16" Angled Tegular	1767	2' x 4' x 3/4"		0.50	30	Class A	0.84			Low	S	
15/16" Angled Tegular	1762	2' x 4' x 3/4"		0.50	35	Class A	0.84			Low	S	
<b>FINE FISSURED Second Look IV</b>												
9/16" Angled Tegular	1768	2' x 4' x 3/4"		0.50	30	Class A	0.84			Low	S	
15/16" Angled Tegular	1763	2' x 4' x 3/4"		0.50	35	Class A	0.84			Low	S	

S = Standard

## Suspension Systems

9/16"	Standard: Suprafine®	
15/16"	Standard: Prelude®	Fire Guard™: Prelude XL Fire Guard

## Physical Data

### Material

Wet-formed mineral fiber

### Surface Finish

Factory-applied latex paint

### Fire Performance

ASTM E84 and CAN/ULC S102 surface burning characteristics. Flame Spread Index 25 or less. Smoke Developed Index 50 or less. (UL labeled) Fire Guard: A fire resistive ceiling when used in applicable UL assemblies

### ASTM E1264 Classification

Type III Form 2, Pattern C E K  
Fire Class A

### Sag Resistance

HumiGuard™ Plus – superior resistance to sagging in high humidity conditions up to, but not including, standing water and outdoor applications.

### No-Added/Low Formaldehyde

No-added formaldehyde – free of formaldehyde-based resins. Outperform CHPS Section 01350 requirements. (Independent test reports available upon request.)

Low Formaldehyde – contributing less than 13.5 ppb in typical conditions per ASHRAE Standard 62, "Ventilation for Acceptable Indoor Air Quality," California Code Title 24, and other building types in CHPS Section 01350.

### Anti Mold/Mildew & Bacteria

BioBlock™ Plus contains an anti-microbial treatment and provides guaranteed resistance against growth of mold/mildew and Gram-positive and Gram-negative odor/stain-causing bacteria for 30 years.

### Insulation Value

R Factor – 1.6 (BTU units)  
R Factor – 0.28 (Watts units)

### Backloading Recommendation

Contact TechLine for specific information

### 30-Year Performance Guarantee & Warranty Information

See warranty details at [armstrong.com/warranty](http://armstrong.com/warranty)

### Weight: Square Feet/Carton

1760, 1761, 1762, 1763, 1765, 1766, 1767, 1768 – 0.75 lbs/SF; 80 SF/ctn  
1861 – 1.25 lbs/SF; 64 SF/ctn

TechLine™ / 1 877 ARMSTRONG  
1 877 276 7876

[armstrong.com/ceilings](http://armstrong.com/ceilings) (search: fine fissured)  
CS-3027-109

© AWI Licensing Company, 2009 • Printed in the United States of America

