

ULTIMA®

Tegular
fine texture

10-YEAR Availability Items 1911, 1912, 1914, 1915



Ultima Beveled Tegular with Suprafine® 9/16" Exposed Tee grid



Ultima Beveled Tegular with Sonata® 9/16" Dimensional Tee grid

Key Selection Attributes

- Smooth, clean, durable finish – Washable, Impact-resistant, Scratch-resistant, Soil-resistant
- **NEW** Scrubable and water-repellent (Ultima High Washability)
- Excellent sound absorption
- High recycled content options – items 1911HRC, 1912HRC, 1914HRC and 1915HRC – 65% pre-consumer, 15% post-consumer
- 30-Year Limited System Warranty against visible sag (excludes item 1905), mold/mildew and bacterial growth
- Visual coordinates with OPTIMA® for mixed (open/closed plan) applications
- Non-directional visual reduces installation time and scrap
- Compatible with the TECHZONE™ Ceiling Systems. Items 1905, 1911, 1912, 1914, 1915 only.
- Smaller size panels available (1 carton min. order). Info: armstrong.com/specials
- Excellent sound blocking – items 1951, 1952
- Plank sizes available (search: Ultima Plank)
- Meets USDA/FSIS guidelines for use in food processing areas (items 1936 and 1937)

Typical Applications

- Offices
- Healthcare – assists in addressing HIPAA requirements
- Classrooms
- Corridors
- Lobbies/reception areas
- Department stores/retail
- Kitchens, dining rooms and food preparation areas (Items 1936 and 1937)

Detail




ULTIMA Beveled Tegular



ULTIMA High Washability Tegular



ULTIMA with SUPRAFINE 9/16" Exposed Tee grid



ULTIMA with SILHOUETTE® XL 9/16" Bolt-Slot 1/4" Reveal grid

Color



White (WH)



Energy	Waste Mgmt	Recycled Content	Local Materials	Renewable Materials	Daylight & Views
✓	✓	✓	✓	✓	✓
Location Dependent					

Acoustics	Low Emitting or CHPS
✓	✓



Visual Selection

Performance Selection Dots represent highest level of performance.

Edge Profile	Item No.	Dimensions	UL Classified	Acoustics NRC CAC	Fire Rating	Light Reflect	Sag Resist	Anti-Microbial	VOC Formaldehyde	Durable	Recycle Program
ULTIMA[†] Tegular											
	1916 1916M	1' x 2' x 3/4" 300 x 600 x 19mm		N/A N/A	Class A	0.90	HumiGuard+	BioBlock+	No Added	Wash Impact Scratch Soil Scrub	Yes
	1912 1912M 1912HRC*	2' x 2' x 3/4" 600 x 600 x 19mm 2' x 2' x 3/4"		0.70 35♦	Class A	0.90			No Added		
	NEW 1952 1952M	2' x 2' x 3/4" 600 x 600 x 19mm		0.60 40	Class A	0.90			No Added		
	1915 1915M 1915HRC*	2' x 4' x 3/4" 600 x 1200 x 19mm 2' x 4' x 3/4"		0.70 35	Class A	0.90			No Added		
	1905 1905M	30" x 30" x 3/4" 750 x 750 x 19mm		0.70 35	Class A	0.90	S		No Added		
	1917 1917M	1' x 2' x 3/4" 300 x 600 x 19mm		N/A N/A	Class A	0.90			No Added		
	1911 1911M 1911HRC*	2' x 2' x 3/4" 600 x 600 x 19mm 2' x 2' x 3/4"		0.70 35	Class A	0.90			No Added		
	NEW 1951 1951M	2' x 2' x 3/4" 600 x 600 x 19mm		0.60 40	Class A	0.90			No Added		
	1914 1914M 1914HRC*	2' x 4' x 3/4" 600 x 1200 x 19mm 2' x 4' x 3/4"		0.70 35	Class A	0.90			No Added		
NEW ULTIMA High Washability (see Health Zone™ Ultima, CS-4066)											
	1936	2' x 2' x 3/4"		0.70 35	Class A	0.86			No Added		
	1937	2' x 2' x 3/4"		0.70 35	Class A	0.86			No Added		

S = Standard ♦ 1912-CAC 33 on 9/16" Interlude, Sonata, Suprafine
 † US Patent 5,674,594 * The recycled content of this product is: 65% pre-consumer; 15% post-consumer

Suspension Systems

9/16"	Standard: Interlude®, Silhouette® Bolt-Slot, Sonata®, Suprafine®, Trimlok® Screw-Slot
15/16"	Standard: Prelude®

Physical Data

Material
 Wet-formed mineral fiber with DuraBrite® acoustically transparent membrane
 1936, 1937 – Wet-formed mineral fiber with DuraBrite® acoustically transparent water-repellent membrane

Surface Finish
 DuraBrite with factory-applied acrylic latex paint

Fire Performance
 ASTM E84 and CAN/ULC S102 surface burning characteristics. Flame Spread Index 25 or less. Smoke Developed Index 50 or less. (UL labeled)

ASTM E1264 Classification
 Type IV, Form 2, Pattern E
 Fire Class A

Sag Resistance
 HumiGuard® Plus – superior resistance to sagging in high humidity conditions up to, but not including, standing water and outdoor applications.

No-Added Formaldehyde
 No-added formaldehyde – free of formaldehyde-based resins. Outperforms CHPS Section 01350 requirements. (Independent test reports available upon request.)

Anti-Mold/Mildew & Bacteria
 BioBlock® Plus contains an anti-microbial treatment and provides guaranteed resistance against growth of mold/mildew and Gram-positive and Gram-negative odor/stain-causing bacteria for 30 years.

Insulation Value
 R Factor – 2.2 (BTU units)
 R Factor – 0.39 (Watts units)

Backloading Recommendation
 Contact TechLine for specific information

30-Year Performance Guarantee & Warranty Information
 See warranty details at armstrong.com/warranty

Application Considerations
 1' x 2' products are not intended for a full ceiling installation and are not UL Classified for acoustics.

Cleaning Recommendations (Items 1936, 1937 only)
 To clean panel, use a clean, white cloth with water or a mild detergent and wipe surface. To disinfect panel, lightly spray surface and wipe clean with a clean, white cloth. Acceptable colorless disinfectants include:

- Sodium hypochlorite
- Hydrogen peroxide
- Isopropyl alcohol
- Quaternary ammonium

Weight; Square Feet/Carton
 1905 – 1.05 lbs/SF; 62.5 SF/ctn
 1911, 1912, 1914, 1915 – 1.05 lbs/SF; 48 SF/ctn
 1916, 1917 – 1.05 lbs/SF; 24 SF/ctn
 1951, 1952 – 1.31 lbs/SF; 48 SF/ctn
 1936, 1937 – 1.08 lbs/SF; 48 SF/ctn

TechLineSM / 1 877 ARMSTRONG
 1 877 276 7876
armstrong.com/ceilings
 (search: ultima)
 CS-3039-909

LEED® is a registered trademark of the U.S. Green Building Council
 All other trademarks used herein are the property of AWI Licensing Company and/or its affiliates
 © 2009 AWI Licensing Company • Printed in the United States of America




ULTIMA®

Square Lay-in
fine texture

10-YEAR
Availability

Items 1910, 1913

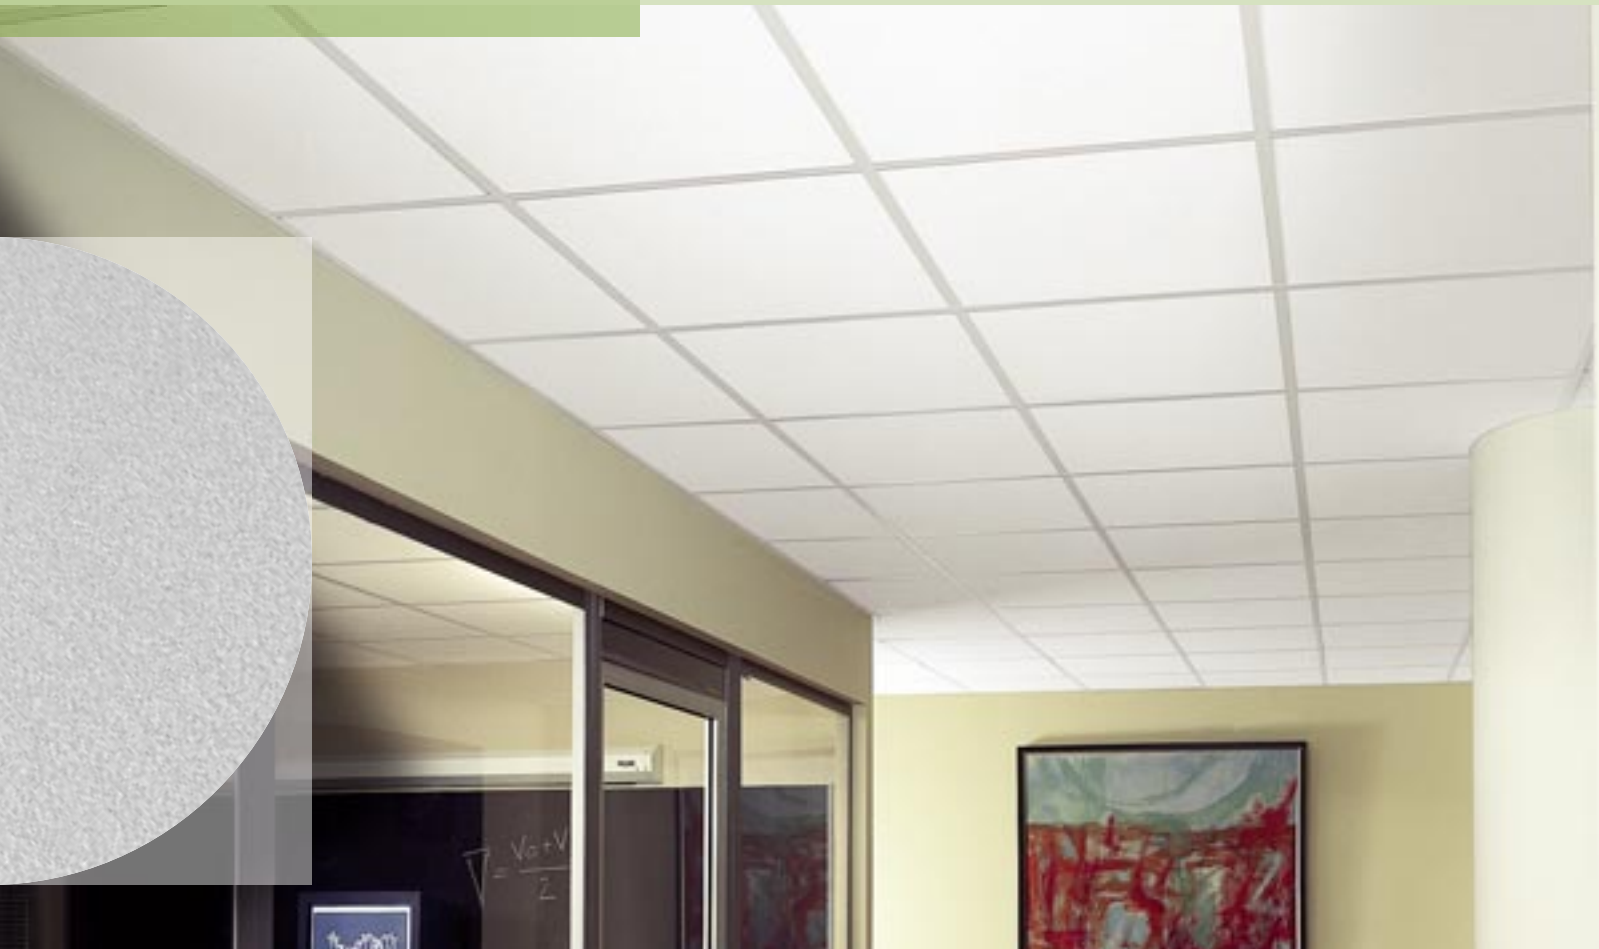

Ultima Square Lay-in with Prelude® 15/16" Exposed Tee grid


Key Selection Attributes

- Smooth, clean, durable finish – Washable, Impact-resistant, Scratch-resistant, Soil-resistant
- **NEW** Scrubbable and water-repellent (Ultima High Washability)
- Excellent sound absorption
- 30-Year Limited System Warranty against visible sag, mold/mildew and bacterial growth
- Visual coordinates with OPTIMA® for mixed (open/closed plan) applications
- Non-directional visual reduces installation time and scrap
- Compatible with TECHZONE™ Ceiling Systems
- Smaller size panels available (1 carton min. order). Info: armstrong.com/specials
- Plank sizes available (search: Ultima Plank)
- Meets USDA/FSIS guidelines for use in food processing areas (item 1935)


Typical Applications

- Offices
- Healthcare – assists in addressing HIPAA requirements
- Classrooms
- Corridors
- Lobbies/reception areas
- Department stores/retail
- Kitchens, dining rooms and food preparation areas (Item 1935)

Detail



ULTIMA
Square Lay-in



ULTIMA High Washability
Square Lay-in



ULTIMA Square Lay-in
with PRELUDE 15/16"
Exposed Tee Grid

Color



White (WH)

LEED® Credits

Energy	Waste Mgmt	Recycled Content	Local Materials	Renewable Materials	Daylight & Views
✓	✓	✓	✓	✓	✓

Location Dependent

LEED for Schools




Acoustics	Low Emitting or CHPS
✓	✓



Visual Selection

Performance Selection

Dots represent highest level of performance.

Edge Profile	Item No.	Dimensions	UL Classified		Fire Rating	Light Reflect	Sag Resist	Anti-Microbial	VOC Formaldehyde	Durable					Recycle Program
			Acoustics NRC	CAC						Wash	Impact	Scratch	Soil	Scrub	
ULTIMA †															
15/16" Square Lay-in 	1910	2' x 2' x 3/4"	□	0.70	35	Class A	0.90	HumiGuard+ BioBlock+	No Added	•	•	•	•	•	•
	1910M	600 x 600 x 19mm		•			•	•							
15/16" Square Lay-in 	1913	2' x 4' x 3/4"	□	0.70	35	Class A	0.90		No Added	•	•	•	•	-	•
	1913M	600 x 1200 x 19mm		•			•	•							
NEW ULTIMA High Washability (see Health Zone™ Ultima, CS-4066)															
15/16" Square Lay-in 	1935	2' x 2' x 3/4"	□	0.70	35	Class A	0.86		No Added	•	•	•	•	•	•

† US Patent 5,674,594

Suspension Systems

15/16" Standard: Prelude®

Physical Data

Material

Wet-formed mineral fiber with DuraBrite® acoustically transparent membrane
1935 – Wet-formed mineral fiber with DuraBrite® acoustically transparent water-repellent membrane

Surface Finish

DuraBrite with factory-applied acrylic latex paint

Fire Performance

ASTM E84 and CAN/ULC S102 surface burning characteristics. Flame Spread Index 25 or less. Smoke Developed Index 50 or less. (UL labeled)

ASTM E1264 Classification

Type IV, Form 2, Pattern E
Fire Class A

Sag Resistance

HumiGuard® Plus – superior resistance to sagging in high humidity conditions up to, but not including, standing water and outdoor applications.

No-Added Formaldehyde

No-added formaldehyde – free of formaldehyde-based resins. Outperforms CHPS Section 01350 requirements. (Independent test reports available upon request.)

Anti Mold/Mildew & Bacteria

BioBlock® Plus contains an anti-microbial treatment and provides guaranteed resistance against growth of mold/mildew and Gram-positive and Gram-negative odor/stain-causing bacteria for 30 years.

Insulation Value

R Factor – 2.2 (BTU units)
R Factor – 0.39 (Watts units)

Backloading Recommendation

Contact TechLine for specific information

30-Year Performance Guarantee & Warranty Information

See warranty details at armstrong.com/warranty

Cleaning Recommendations (Item 1935 only)

To clean panel, use a clean, white cloth with water or a mild detergent and wipe surface. To disinfect panel, lightly spray surface and wipe clean with a clean, white cloth. Acceptable colorless disinfectants include:

- Sodium hypochlorite
- Isopropyl alcohol
- Hydrogen peroxide
- Quaternary ammonium

Weight; Square Feet/Carton

1.08 lbs/SF; 48 SF/ctn