


# Create!™ ULTIMA®, ULTIMA Health Zone™, and OPTIMA®

Square Lay-in, Tegular & Vector®

fine texture



Ultima Create! Vector with Prelude® 15/16" suspension system (Pg. 259)



Original artwork

Ultima, Ultima Health Zone, or Optima Ceiling Panels



Custom wall-to-wall ceilings or floating clouds



Visit [Armstrong.com](http://Armstrong.com) Photo Gallery to view more installation photos

SEARCH: Create!

## KEY SELECTION ATTRIBUTES

- Artistic designs have broad appeal and complement unique interior design
- Mix and match designs with standard Ultima, Ultima Health Zone, and Optima
- Excellent sound absorption – NRC 0.70 – 0.90
- All the high performance benefits of Ultima or Optima fine-textured ceilings:
  - Water-repellent (Ultima Health Zone)

- Product is directional
- Custom samples available
- Can contribute to LEED® credits

## TYPICAL APPLICATIONS

- Classrooms
- Libraries/media centers
- Lobbies/reception areas
- Retail
- Restaurant

## CREATE!™ MAKES IT EASY TO CREATE UNIQUE, CUSTOM CEILING DESIGNS USING COLOR AND ARTWORK.

### Original Artwork Guidelines:

- Artwork must be vector-based
- Acceptable file types:
  - Adobe® Illustrator® – .ai
  - Encapsulated PostScript – .eps
  - Scalable Vector Graphics – .svg
- Acceptable Color Mode: CMYK

### Original Digital Image Requirements:

- Image must be 150 dpi at full print size
- Acceptable file types:
  - Joint Photographic Experts Group – .jpg
  - Tagged Image File Format – .tiff

### Solid Color Requirements:

- Choose from 100 color options suggested on Armstrong Create! sample\*
- Choose to match one of the RAL classic colors available on suspension systems and perimeter trims
- Custom colors are available

\* The Ultima/Optima colors and the Health Zone colors appear slightly different due to scrim surface texture.

Adobe® Illustrator® is a registered trademark of Adobe Systems Incorporated.

# Create!™ ULTIMA®, ULTIMA Health Zone™, and OPTIMA®


Square Lay-in, Tegular & Vector®  
fine texture

## THEMES – AVAILABLE ON ALL CREATE! PANELS

### Blooms



Single Panel  
Design 021




4-Panel Design  
Design 022 (Add  
A, B, C, or D for  
individual panel  
order)

### Dragonflies



Single Panel  
Design 051



4-Panel Design  
Design 052 (Add  
A, B, C, or D for  
individual panel  
order)

### Stars



Single Panel  
Design 041



Single Panel  
Design 042



Single Panel  
Design 043

### Bubbles



Single Panel  
Design 011



Single Panel  
Design 012




Single Panel  
Design 013


## WOOD LOOKS – AVAILABLE ON ULTIMA HEALTH ZONE CREATE! SQUARE LAY-IN PANELS Due to printing limitations, shade may vary from actual product.




Bamboo (BA)




Barnwood (BW)



Light Cherry (LC)





Oak (OK)



Walnut (WN)

## COLOR REFERENCE CHART

Choose from the standard colors shown on the front of Create! 6" x 6" submittal samples. Keep in mind, sheen varies slightly depending on base panel selection (Ultima, Ultima Health Zone, Optima). Custom colors available.

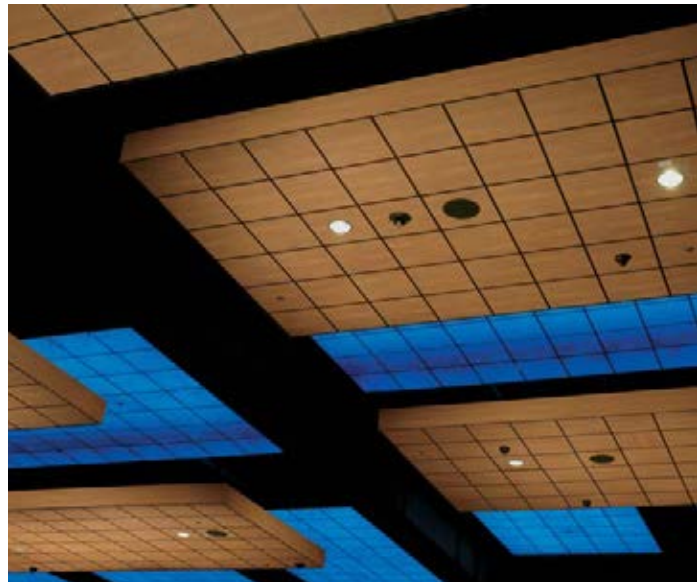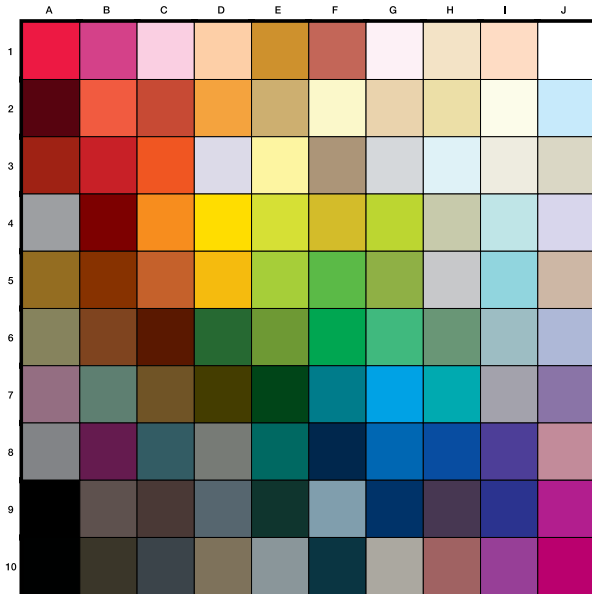

Ultima Health Zone Create! in Walnut with coordinating suspension system and trim

## COORDINATING SUSPENSION SYSTEM AND TRIM COLORS Due to printing limitations, shade may vary from actual product.

### Custom RAL Colors



RAL  
Colors

See page 54 for a sampling of RAL colors.



# Create!™ – ULTIMA®, ULTIMA Health Zone™, and OPTIMA®

Square Lay-in, Tegular & Vector®  
fine texture

UP TO **77%** RECYCLED CONTENT

**LEED®**

- acoustics
- energy
- daylight & views
- indoor air quality
- renewable materials
- recycled content
- waste mgmt
- local\* materials

Calculate LEED contribution at [armstrong.com/greengenie](http://armstrong.com/greengenie)

\*LOCATION DEPENDENT

## VISUAL SELECTION

## PERFORMANCE

Dots represent high level of performance.


Edge Profile Suspension System	Item No.	Dimensions (Inches)	Acoustics		Fire Rating	Anti-Mold & Mildew BioBlock+	Sag Resist Humi-Guard+	Certified Low VOC Emissions	Durability			Recycled Content*	Recycle Program	Warranty†
			NRC	CAC					Water Repel	Wash	Soil			
<b>ULTIMA or OPTIMA Create! Square Lay-in</b>														
for 15/16" Prelude XL	<b>Z1910UC1</b>	24 x 24 x 3/4"	0.70 <sup>††</sup> ●	35	Class A	●	●	–	–	●	●	High	●	30
	<b>Z33520C1</b>	24 x 24 x 3/4"	0.90 <sup>††</sup> ●	26	Class A	●	●	–	–	●	●	High	●	30
<b>ULTIMA Create! Tegular</b>														
for 9/16" Silhouette XL ONLY; 1/4" or 1/8" Reveal	<b>Z1912UC1</b>	24 x 24 x 3/4"	0.70 <sup>††</sup> ●	35	Class A	●	●	–	–	●	●	High	●	30
<b>ULTIMA or OPTIMA Create! Vector</b>														
for 15/16" Prelude XL (White only)	<b>Z1920UC1</b>	24 x 24 x 3/4"	0.70 <sup>††</sup> ●	33	Class A	●	●	–	–	●	●	High	●	30
	<b>Z39010C1</b>	24 x 24 x 7/8"	0.80 <sup>††</sup> ●	26	Class A	●	●	–	–	●	●	High	●	30
<b>ULTIMA Health Zone Create! Square Lay-in</b>														
for 15/16" Prelude XL	<b>Z1935UC1</b> _ ♦♦	24 x 24 x 3/4"	0.70 <sup>††</sup> ●	35	Class A	●	●	–	●	●	●	High	●	30
<b>ULTIMA Health Zone Create! Tegular</b>														
for 9/16" Silhouette XL ONLY; 1/4" or 1/8" Reveal	<b>Z1936UC1</b>	24 x 24 x 3/4"	0.70 <sup>††</sup> ●	35	Class A	●	●	–	●	●	●	High	●	30

NOTE: Replacement panels may vary slightly in color due to material variations over time. Product could have slight color variation from run to run; adequate attic stock should be ordered.


†† Based on image/color coverage, NRC may vary slightly.

♦♦ Add 2-letter color suffix to item when specifying or ordering standard Wood Looks items. (e.g., Z1935UC1 L C)


## SUSPENSION SYSTEMS AND EDGE DETAILS




**Vector Panel and Prelude® XL®**  
(White suspension required for Vector)



**Tegular Panel and Silhouette® XL® 1/4" Reveal**



**Tegular Panel and Silhouette XL 1/8" Reveal**



**Lay-in Panel and Prelude® XL® or 360° Painted Grid**

## PHYSICAL DATA

### Material

Ultima/Ultima Health Zone: Wet-formed mineral fiber  
Optima: Fiberglass with DuraBrite® acoustically transparent membrane with CAC-backing

### Surface Finish

Factory-applied latex paint with UV printing

### Fire Performance

ASTM E84 and CAN/ULC S102 surface burning characteristics. Flame Spread Index 25 or less. Smoke Developed Index 50 or less. (UL labeled)

### ASTM E1264 Classification

Ultima/Ultima Health Zone: Type III, Form 2, Pattern E  
Optima: Type XII, Form 2, Pattern E  
Fire Class A



### Sag Resistance

HumiGuard® Plus – superior resistance to sagging in high humidity conditions up to, but not including, standing water and outdoor applications.

### Anti Mold/Mildew & Bacteria

Ultima/Ultima Health Zone: BioBlock® Plus contains an anti-microbial treatment and provides guaranteed resistance against growth of mold/mildew and Gram-positive and Gram-negative odor/stain-causing bacteria for 30 years.

Optima: Fiberglass substrate is inherently resistant to the growth of mold, mildew, and bacteria.

### High Recycled Content\*

Contains greater than 50% total recycled content. Total recycled content based on product composition of post-consumer and pre-consumer (post-industrial) recycled content per FTC guidelines.

### Insulation Value

Ultima/Ultima Health Zone:  
R Factor – 1.6 (BTU units)  
R Factor – 0.28 (Watts units)  
Optima:  
R Factor – 4.0 (BTU units)  
R Factor – 0.70 (Watts units)

### 30-Year Performance Guarantee & Warranty†

When installed with Armstrong Suspension System. 1-year limited warranty on color. Details at [armstrong.com/warranty](http://armstrong.com/warranty)

### Weight; Square Feet/Carton

Ultima/Ultima Health Zone: 1.05 lbs/SF; 16 SF/ctn  
Optima: 0.55 lbs/SF; 16 SF/ctn

### Minimum Order Quantity:

1 carton

